

Modern Temperature and Humidity Display Board

TRH-3305



Range : $-30 \sim 70.0\text{ }^{\circ}\text{C}$ / $20.0 \sim 99.9\%\text{RH}$

Resolution : $0.1\text{ }^{\circ}\text{C}$ / $0.1\%\text{RH}$

Accuracy : $\pm 0.5\text{ }^{\circ}\text{C}$ / $\pm 5\%\text{RH}$ (@ 25°C)


LED Size : 45 x 26 mm **Visibale Distance 20 Meters**

Environment : $0 \sim 50\text{ }^{\circ}\text{C}$ / $20 \sim 90\%\text{RH}$ (Non-condensing)

Weight : 395 x 255 x 55 mm / 2.3 kg

External Temp. & RH Sensor

Sensor and display panel are separated; 3-meter sensor cable allows flexible monitoring.

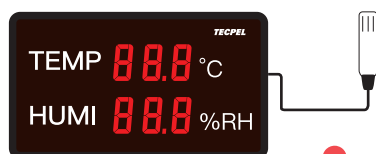

High-Precision Temp. & RH **Swiss-made Sensor**

Low error, ideal for precise environments.
Temp. accuracy: $\pm 0.5\text{ }^{\circ}\text{C}$
humidity: $\pm 5\%\text{RH}$.



Adjustable/ Compensated Temp. & RH Values

Digital correction compensates sensor drift over time, extending sensor lifespan.

