

TRH-3305

Measuring Range : $-30 \sim 70.0\text{ }^{\circ}\text{C}$ / $20.0 \sim 99.9\%\text{RH}$

Resolution : $0.1\text{ }^{\circ}\text{C}$ (Above $0\text{ }^{\circ}\text{C}$) / $0.1\%\text{RH}$

Accuracy : $\pm 0.5\text{ }^{\circ}\text{C}$ / $\pm 5\%\text{RH}$ (@ 25°C)


LED Size : 45 x 26 mm

Ambient range : $0 \sim 50\text{ }^{\circ}\text{C}$ / $20 \sim 90\%\text{RH}$ (Non-condensing)

Size/Dimensions : 395 x 255 x 55 mm / 2.3 kg


External Temp/Humidity Sensor

The sensor is separated from the display board, and the sensor cable is 3 meters long, which can flexibly measure the monitoring area.

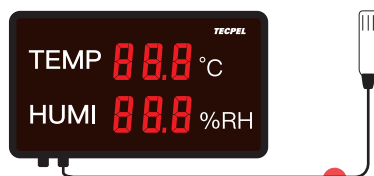

Precisional Temp/Humidity Sensor

The error is small, and it can be used in an environment that requires precise monitoring. The temperature error specification is only $0.5\text{ }^{\circ}\text{C}$, and the humidity is 5 %

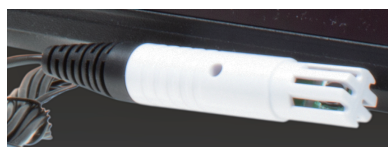

Compensable Measured value of temperature and humidity

When the sensor gradually During the aging process, through digital repair Positive, compensation error value, delay sensing device usage time.

